




tradition • innovation • quality

DO-IT-YOURSELF

a.b.e.® Construction Chemicals

abe® membrane

HIGH STRENGTH POLYESTER REINFORCED MEMBRANE

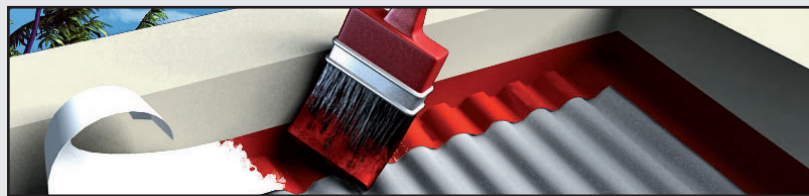

PARAPET WALLS, ROOF LAPS, FLASHINGS

WATERPROOFING

DESCRIPTION

abe® membrane is a high strength polyester reinforced membrane for use with a.b.e.® waterproofing systems.

USES

Suitable for use with a.b.e.® waterproofing and flashing systems.

ADVANTAGES

- High strength.
- Reinforce waterproofing systems.
- Will not shrink or perish.
- Bridges cracks and gaps.

SURFACE PREPARATION

Surfaces must be clean and free from dust and grease. Must be used in accordance with the waterproofing or flashing specification of the product.

COVERAGE

As required.

APPLICATION

Follow the waterproofing or flashing specification of the product it gets used with.

COLOUR



PROTECTION ON COMPLETION

abe® membrane will not perish, but need to be over coated as specified by the waterproofing system.

PACKAGING

abe® membrane is supplied in the following sizes:

- 1 m x 1 m
- 10 m x 1 m
- 100 mm x 10 m
- 100 mm x 20 m
- 200 mm x 2.5 m
- 200 mm x 10 m
- 200 mm x 12.5 m
- 200 mm x 20 m
- 250 mm x 10 m
- 250 mm x 20 m
- 300 mm x 20 m
- 500 mm x 10 m

PROPERTIES

Weight	90 - 100 g/m ²
Thickness	0.8 - 1.2 mm

HANDLING & STORAGE

Shelf life of 24 months if kept in a dry cool place in the original packaging.

a.b.e.® is an ISO 9001:2008 registered company
 PO Box 5100, Boksburg North, 1461, South Africa
 Website: www.abe.co.za | Tel: +27(0) 11 306 9000
 Durban | Johannesburg | Cape Town | Port Elizabeth | East London | Bloemfontein | George

a.b.e.® is a Chryso Group Company



DATE UPDATED: 01/03/16